




# EPSON I3200 DOUBLE HEAD PRINTER

## 爱普生I3200双头写真机

### EP3202

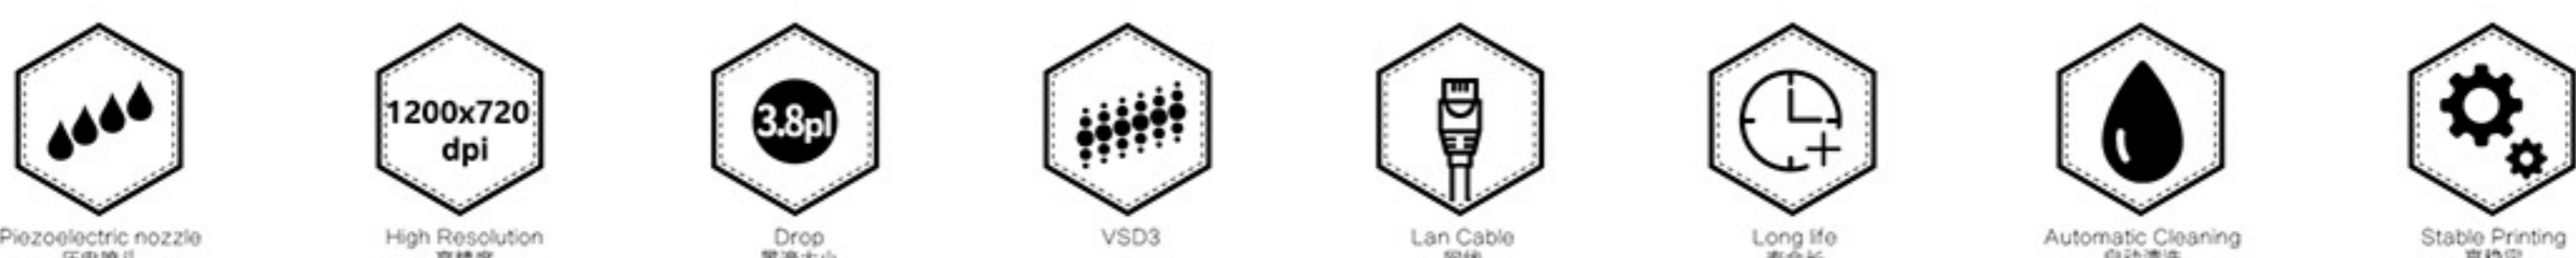

#### Printing Speed

3PASS				4PASS				6PASS			
Weak Feather 弱羽化	Normal Feather 中羽化	Strong Feather 强羽化		Weak Feather 弱羽化	Normal Feather 中羽化	Strong Feather 强羽化		Weak Feather 弱羽化	Normal Feather 中羽化	Strong Feather 强羽化	
360X1800	49m <sup>2</sup> /h	46.5m <sup>2</sup> /h	38.5m <sup>2</sup> /h	720X1200	36m <sup>2</sup> /h	34m <sup>2</sup> /h	30m <sup>2</sup> /h	720X1800	25m <sup>2</sup> /h	23m <sup>2</sup> /h	22m <sup>2</sup> /h

#### Photo 细节展示



Boards& RIP 板卡和软件	Boards(板卡) Password(密码) Rip Software(RIP软件)	<ul style="list-style-type: none"> <li>Hoson/BYHX Boards(汉森/北京)</li> <li>Build in Boards &amp; Showing in Software(板卡自带)</li> <li>Maintop Rip Software(蒙泰6.1)</li> </ul>
Body 机架	Main Girder Structure(主梁支撑) Y-Axis(Y轴) Beam(运动横梁) Linear Guide Way(导轨) Pinch Roller(压轮组件) Printing Bed(打印平台) Suction System(平台吸风) LED lighting (平台LED)	160*800*5mm Square Tube(60*80*5方管) 20mm Diameter(20毫米主轴) Aluminium Beam(铝合金横梁) THK linear guide way With two Block(THK静音导轨) Hi Precision 3 level Pinch roller(高精度三段式压轮组件) 144mm Wide Printing Bed(144毫米宽打印平台) Adjustable Vacuum Suction System(可调节吸风) Printing Bed Lighting System(平台LED照明)
Carriage 小车	Belt(皮带) Chain(拖链) Cable(主数据线) Power Cable(电源线) Encoder(光栅解码器) Carriage Lifting (升降) Capping(保湿) Anti Collision(防撞)	Italy MEGADYNE Belt(意大利麦高迪皮带) Chinese Drag Chain(国产静音拖链) Fiber(光纤) Germany Igus Power Cable(德国IGUS高柔电缆) 180DPI(9730) Manual type Carriage Lifting System(手动升降小车) Automatic Capping & Wiping system(全自动吸墨和刮墨系统) Anti Collision System(小车防撞系统)
Motor 电机	X Motor(X轴电机) Y Motor(Y轴电机) XY Motor Bracket(电机支架)	Leadshine 180W DC Servo Motor(雷赛180瓦直流电机) Leadshine 180W DC Servo Motor(雷赛180瓦直流电机) Metal Brackets(金属支架)
F&T 收放料	Paper Sensor(缺纸感应探头) Feeding and Take up(收放料)	Paper Out Warning Sensor(缺纸感应探头) Double Industry Motor(工业型双动力收放料系统) Banner Feeding System(带灯布放料系统) No Banner Take Up System(无灯布收料系统)
Ink Supply 供墨	Leveling Stand(防抖地撑) INK Supply System(供墨) Main INK tank(主墨桶) Damper(墨囊) Ink Pump(墨泵)	Leveling Stand(防抖地撑) Bulk ink Supply system(大供墨系统) 1.5L Main INK tank(1.5L容量主墨桶) Negative type Damper(负压墨囊) SPD Ink Pump(赛普达墨泵)
Heating&Drying 加热和烘干	Drying System(干燥) Heating Control Panel(加热控制面板) Heating System(加热) Carriage Plate Heater(小车底板加热)	3500W IR Heater(3500瓦红外干燥系统) 3 in 1 Heating Control Panel(多合一控制系统) Rear-Printing Bed-Front 3 Heaters(前中后三加热) 24V DC Heater(直流24V加热片)
Packing 包装	Printer Name Plate(铭牌) Printer Size(打印机尺寸)L*W*H Printer Packing (打印机包装) N.W.(净重)G.W.(毛重) Packingsize(包装尺寸) 20GP/40HQ	Alumimul Name Plate(铝制CE铭牌) 4580*980*1550 Wooden Box (免熏蒸木制包装箱) 750KGS/850KGS 4800*750*1130/1050*760*1130 6PCS/12PCS

